

gizmo ZOOM

Equipped with an adjustable PC lens of high quality



Easy-to-use zoom function

Available in many variations

Gizmo Zoom is a great complement to the original Gizmo.

It features a variable beam angle, making it possible to illuminate an object either from up close, or from farther away. This is useful for when needing to pinpoint or enhance certain objects in an exhibit.

Gizmo Zoom is available for the following lighting systems:



Pico Trac (12V DC)

- * Fixture has built-in 0-100% dimmer
- * No external dimming possible
- * Easy to install



LED Profile (Constant current)

- * Dimmable from the wall or the app
- * Can utilize external LED driver functions e.g. wall dimmers, Casambi, DMX or DALI
- * Installed with connector cables





Zoom optics


TECHNICAL SPECIFICATION

Material	Lamp housing made of aluminium, Yoke and details made of steel, Anti-reflective lens made of glass
Finish	Grey (RAL 7040) Black (RAL 9005) White (RAL 9016) Brass
System	Pico Trac LED Profile
Protection class	IP20
Power consumption	2,1W/3W
Beam angle	Adjustable 5–31°
Color temperatures	2200K, 2700K, 3000K, 4000K
Swivels	>365°
Tilts	>90°
Weight	50 g
Features	Toolless pan, Tilt lock
Optional accessories	Snoot, Magnet, Ceiling cup

LIGHT DATA

LED Lumen	190 lm
Luminaire Lumen	80 lm
CRI	90
Red component R9	>60
MacAdam	3-step ellipse (SDCM 3)
TM30-18 Rf	95
TM30-18 Rg	100

* Data from 3000K, widest beam angle

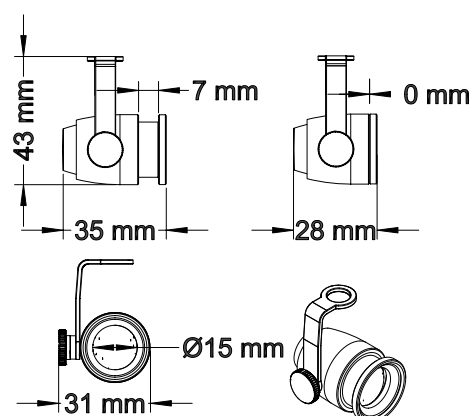

SPOTLIGHTS GIZMO ZOOM



GIZMO ZOOM / CCL

For LED Profile

Operated by external LED driver, max 700 mA / 2,1W, Vf = 3V

2200K	GIZZ22-CCL-*	Gizmo Zoom CC/700mA LED-profile 2200K	190lm, CRI 80, Vf=3V, 5-30°
2700K	GIZZ27-CCL-*	Gizmo Zoom CC/700mA LED-profile 2700K	180lm, CRI 90, Vf=3V, 5-30°
3000K	GIZZ30-CCL-*	Gizmo Zoom CC/700mA LED-profile 3000K	190lm, CRI 90, Vf=3V, 5-30°
4000K	GIZZ40-CCL-*	Gizmo Zoom CC/700mA LED-profile 4000K	200lm, CRI 90, Vf=3V, 5-30°

* 1: Grey 2: Black 3: White 4: Brass



GIZMO ZOOM / CCS

No driver / adapter included

Operated by external LED driver, max 700 mA / 2,1W, Vf = 3V

2200K	GIZZ22-CCS-*	Gizmo Z CC/700mA Solo 2200K	190lm, CRI 80, Vf=3V, 5-30°, 1m cable
2700K	GIZZ27-CCS-*	Gizmo Z CC/700mA Solo 2700K	180lm, CRI 90, Vf=3V, 5-30°, 1m cable
3000K	GIZZ30-CCS-*	Gizmo Z CC/700mA Solo 3000K	190lm, CRI 90, Vf=3V, 5-30°, 1m cable
4000K	GIZZ40-CCS-*	Gizmo Z CC/700mA Solo 4000K	200lm, CRI 90, Vf=3V, 5-30°, 1m cable
5700K	GIZZ57-CCS-*	Gizmo Z CC/700mA Solo 5700K	210lm, CRI 90, Vf=3V, 5-30°, 1m cable

* 1: Grey 2: Black 3: White 4: Brass 5: Stainless



GIZMO ZOOM / PICO TRAC

Built-in local dimmer (0-100%)

Fits Pico Trac

2200K	GIZZ22-PT-*	Gizmo Zoom 12V DC/3W PicoTrac 2200K	190lm, CRI 80, 5-30°, dimmer
2700K	GIZZ27-PT-*	Gizmo Zoom 12V DC/3W PicoTrac 2700K	180lm, CRI 90, 5-30°, dimmer
3000K	GIZZ30-PT-*	Gizmo Zoom 12V DC/3W PicoTrac 3000K	190lm, CRI 90, 5-30°, dimmer
4000K	GIZZ40-PT-*	Gizmo Zoom 12V DC/3W PicoTrac 4000K	200lm, CRI 90, 5-30°, dimmer
5700K	GIZZ57-PT-*	Gizmo Zoom 12V DC/3W PicoTrac 5700K	210lm, CRI 90, 5-30°, dimmer

* 1: Grey 2: Black 3: White 4: Brass









GIZMO ZOOM PT CASAMBI

Fixture is configured using the Casambi app
Fits Pico Trac

2200K	GIZZ22-PTC-*	Gizmo Zoom 12V DC/3W PT Casambi 2200K	190lm, CRI 80, 5-30°, Casambi
2700K	GIZZ27-PTC-*	Gizmo Zoom 12V DC/3W PT Casambi 2700K	180lm, CRI 90, 5-30°, Casambi
3000K	GIZZ30-PTC-*	Gizmo Zoom 12V DC/3W PT Casambi 3000K	190lm, CRI 90, 5-30°, Casambi
4000K	GIZZ40-PTC-*	Gizmo Zoom 12V DC/3W PT Casambi 4000K	200lm, CRI 90, 5-30°, Casambi
5700K	GIZZ57-PTC-*	Gizmo Zoom 12V DC/3W PT Casambi 5700K	210lm, CRI 90, 5-30°, Casambi

* 1: Grey  2: Black  3: White  4: Brass  5: Stainless 