
Manual V1.6 - July 2018



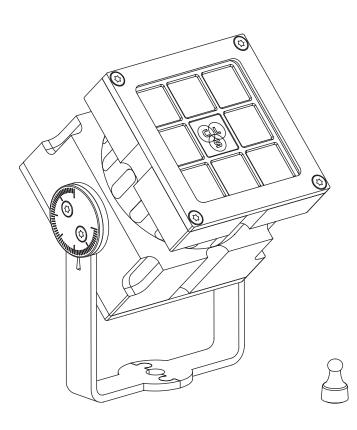

DRIVER DRIVER

Index	2
Safety information	2
Content	2
Technical	3
Specifications	3

Installation	4
Magno dimming	5
Lens replacement	6
Lens index	_7
List of symbols	8

SAFETY INFORMATION











Disconnect the power supply before installing or maintaining


Make sure all connectors are connected properly

Use a source of AC power that complies to local electrical codes Block access below the work area when maintaining the unit Don't modify or install genuine parts on this product


Don't install in a flammable or explosive area

Warning! Some surfaces can be hot

CONTENT













TECHNICAL

INSTALLATION

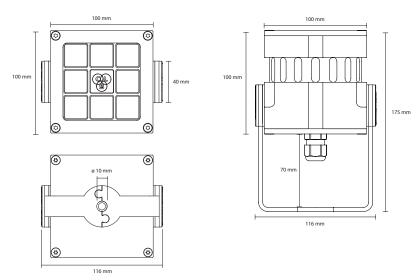

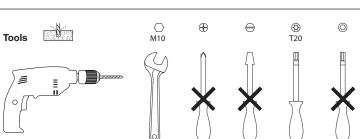



LED: 8 x Cree or Luxeon Rebel

Available colours: 2700K, 3000K, 4000K, 5000K, 6500K,

amber, royal blue, green and red

Lenses: 8°, 12°, 30°, 61°, 80° and 12x46°

Power supply: 100 - 240 VAC
Power consumption: Max. 20 Watt
Housing: Anodised aluminum

Weight: 1,9 kg
IP value: IP67
Cable length: 2 meters

Measurements: 175 x 116 x 100 mm (hxwxd)

Ambient temperature: -30° C till +50° C

ACCESSORIES

110415 CLS REVO lens kit superspot 8° 8 pcs of lenses 110425 CLS REVO lens kit spot 12° 8 pcs of lenses

425 CL3 REVO IEIIS KIT SPOT IZ 6 pCS 01 IEIISES


110435 CLS REV0 lens kit medium flood 30° 8 pcs of lenses


110445 CLS REVO lens kit wide flood 61° 8 pcs of lenses


110455 CLS REVO lens kit elliptical 12x46° 8 pcs of lenses


871995 CLS mold set Paguro grey


Y106016 CLS Magenet pin (4 pcs)






















MAGNO DIMMING


LENS REPLACEMENT



















To get the

desired intensity

level, hold the magnet on the REVO

- 2. The REVO starts slowly dimming from 100 1% in approx. 30 seconds. The dimming is very accurate and precise, so steps are very small.
- 3. At the desired intensity level, take away the magnet.
- 4. After 10 seconds the REVO flashes one time, the value has been stored on the internal memory.
- 5. When powering up the REVO, the stored value will be recalled from the internal memory.
- **6.** If you want to have a lower value, replace the magnet and the REVO dims further to lower levels. To store the new setting repeat step 3 5.
- 7. If the REVO is being dimmed to Level 0 and you have not programmed a value, it will automatically start at Level 100 and dim back from 100 1%.

2018 CLS-LED BV. All rights reserved. Information subject to change without notice, CLS-LED BV and all affiliated companies disclaim liability for injury, damage direct or indirect loss, consequential or economic loss or any other loss occasioned by the use of, inability to use or reliance on the information contained in this manual. No part of this manual may be reproduced, in any form or by any means, without permission in writing from CLS-LED BV. Other legal information can be found in our General conditions, found on the back of your CLS-LED BV invoice, inside the CLS catalogue or on our website www.cls-led.com/General-Terms.pdf






www.cls-led.com

LENS INDEX


LIST OF SYMBOLS





(3)


Medium Flood 30°

(5)









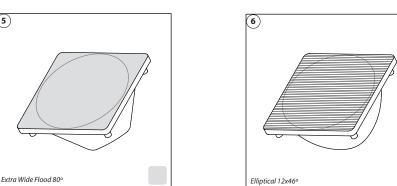

7









Installation depth
















Colour changing RGB, RGB-W, RGB-A AWB or Tunable White









Colour

Available colours; Amber, blue, red or green






Minimal bending curve






LED pitch Pitch between the LEDs











DMX 512

CLS DYNAMIC COLOUR COB





Dynamic Control Dynamic Power Control or Dynamic Temperature Control

Bluetooth controlled







Combined product Compose your own fixture



Warranty 3 or 5 years warranty on







CITIZEN	XICATO	Lightsource Equipped with a CLS, Citizen or a Xicato LED module





