


# Cover HR-ALU-15

Ref. B17206F

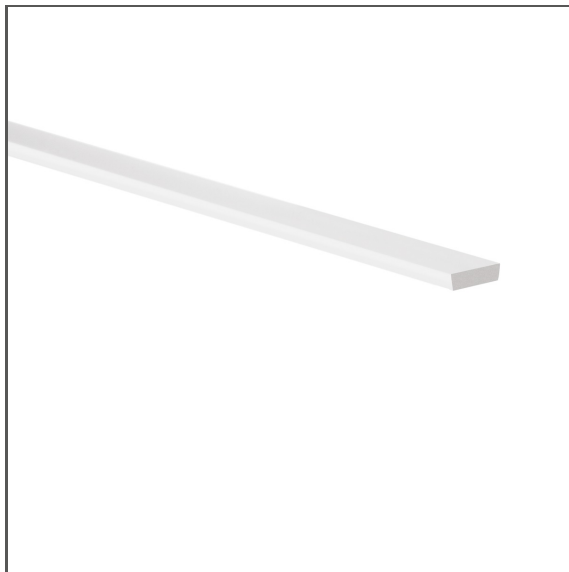

- For the construction of sealed lighting fixtures

## APPLICATION

- LED protection and light diffusion in lighting fixtures


## MOUNTING

- to the profile, by pressing

## ADDITIONAL INFORMATION

- ATTENTION! rigid cover, not intended for bending or deformation
- standard lengths of KLUŚ profiles and covers: 1000 mm (tolerance  $\pm 1.5$  mm) and 2005 mm / 3010 mm (tolerance + 5 mm); for selected covers: 6050 mm, 10050 mm (tolerance + 5 mm)
- when choosing a different length of profiles / covers than available in the standard, you should additionally choose the cutting service at KLUŚ

## TECHNICAL DRAWING



## TECHNICAL SPECIFICATIONS

Finish	frosted
Material	PC
Shape	flat
Maximum length on request	3000 mm
Light transmission	54 %
Width	15 mm
High mechanical resistance	yes
UV resistance	yes

Length	Ref
1000 mm	B17206F_1
2005 mm	B17206F_2
3010 mm	B17206F_3

## RELATED PROFILES > FOR FLOORS



**HR-ALU**  
A01889