


Cuelux2

The Cuelux2 DMX interface is bundled with the Cuelux software; an intuitive software lighting control desk for intelligent lights, LED, dimmers and various other effects.

The Cuelux software which is available for Windows, MacOs and Ubuntu Linux. The software is available from the Visual Productions website.

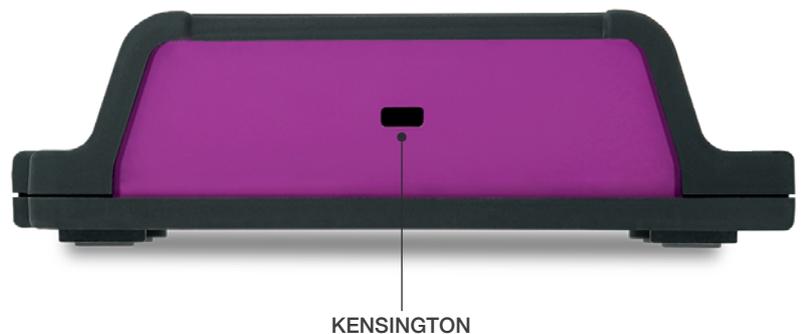

SPECIFICATIONS

- USB
- DMX512-A (ANSI E1.11) port (Opto-isolated)
- Desktop or DIN Rail mounted (optional adapter)
- Kensington lock
- Operating temperature -20°C to +50°C (-4°F to 122°F)
- Compliance EN55103-1 EN55103-2
- Bundled with Cuelux software