


Index	2	Installation	4
Safety information	2	Lens replacement	5
Content	2	Lens index	6
Technical	3	List of symbols	7
Specifications	3		

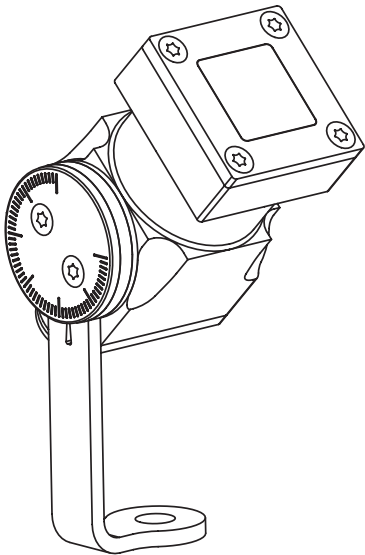

SAFETY INFORMATION

Do not touch the lens with bare hands.

Do not stare into the LED.

Ambiance
Max. 40°

Qualified technician

Disconnect the power supply before installing or maintaining

Make sure all connectors are connected properly

Use a source of AC power that complies with local electrical codes



Block access below the work area when maintaining the unit

Don't modify or install genuine parts on this product

Don't install in a flammable or explosive area

Warning!
Some surfaces can be hot

CONTENT

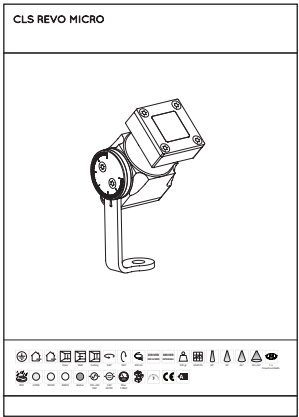

IP67

2700K

3000K

4000K

Amber

100-240 VAC

24V AC/DC

Max. 5 Watt

DRIVER INCLUDED

DRIVER INTERNAL

340 gr

50,000 h



20°

30°

66°

20 x 42°

1 x Cree/Lumileds

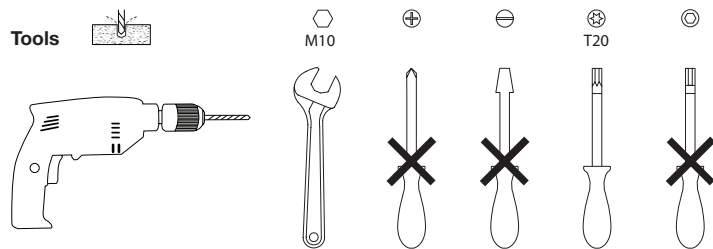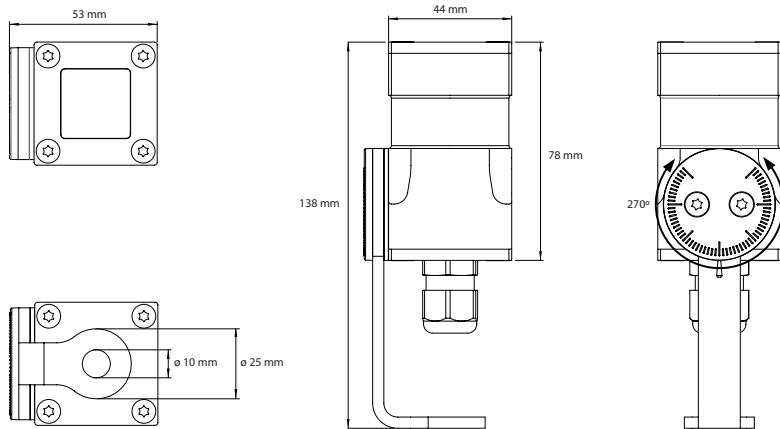


SPECIFICATIONS


LED: 1 x Cree or Luxeon Rebel
 Available colours: 2700K, 3000K, 4000K or amber
 Lenses: 20°, 30°, 66° and 20x42°
 Power supply: 100 ~ 240 VAC or 24V AC/DC
 Power consumption: Max. 5 Watt
 Swivel: 360° horizontal, 360° vertical
 Housing: Anodised aluminum
 Weight: 340 gr
 IP value: IP67
 Cable length: 2 meters
 Measurements: 138 x 53 x 44 mm (h x w x d)
 Ambient temperature: -20° C till +50° C

ACCESSORIES


871992 CLS mold set, straight 8-26mm
 871995 CLS mold set Paguro grey

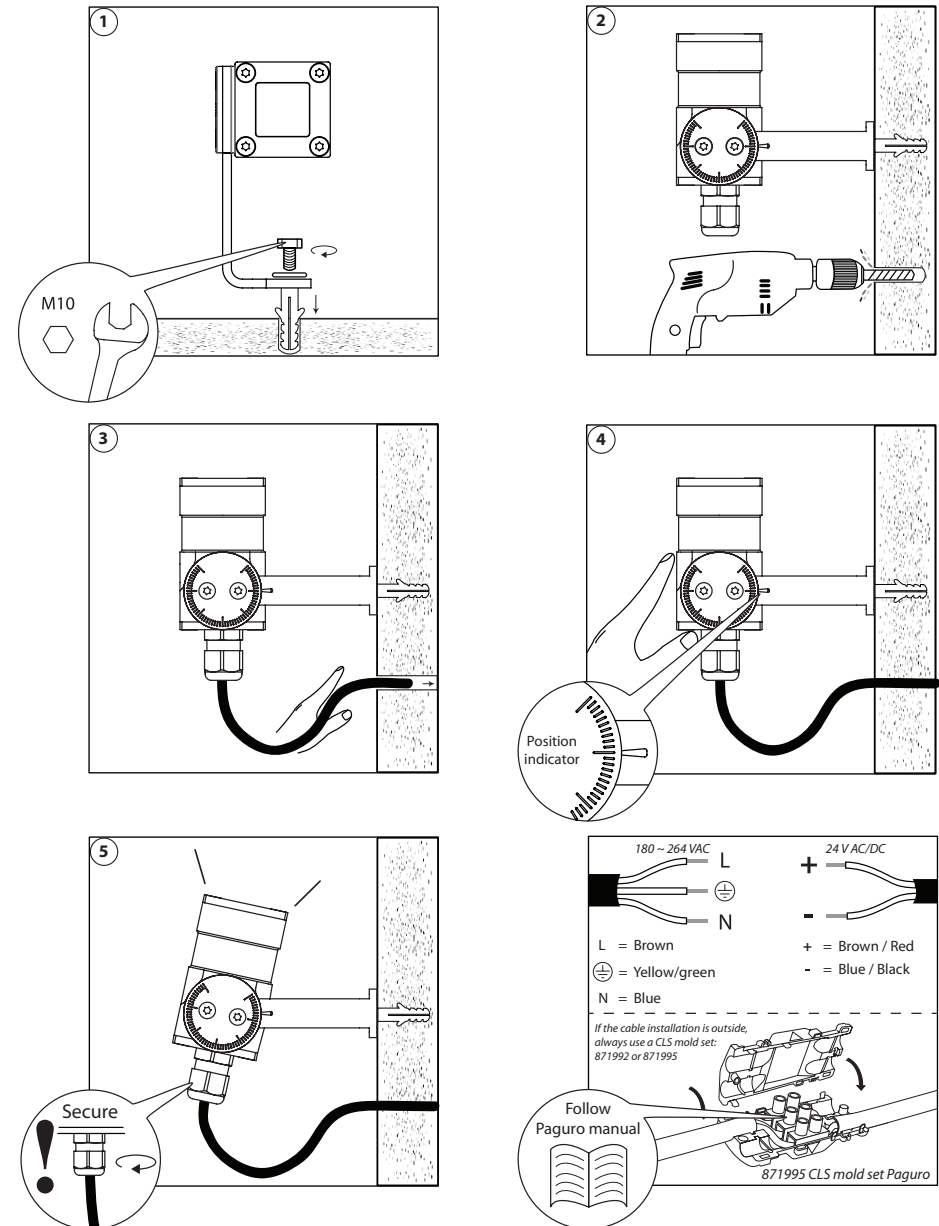

LENS REPLACEMENT

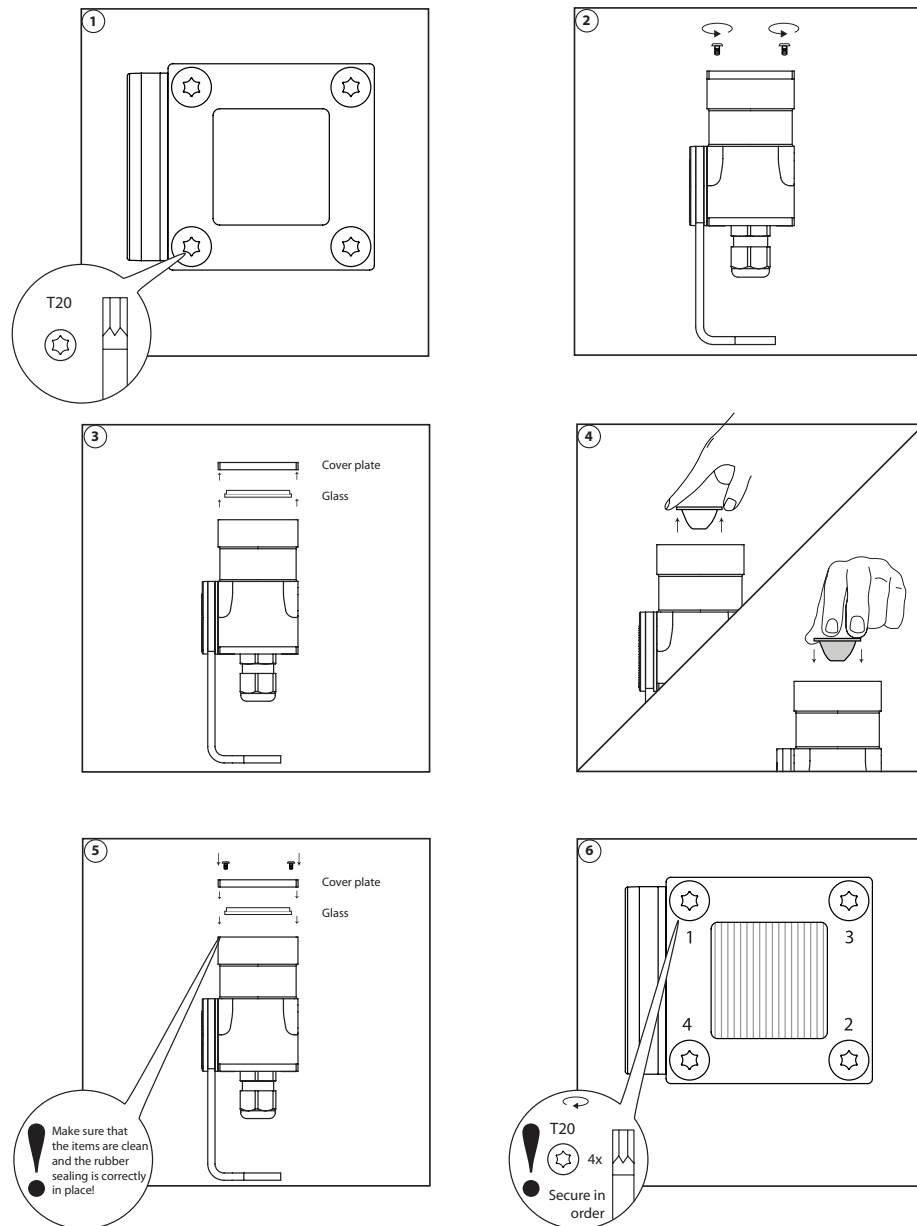

LENS INDEX

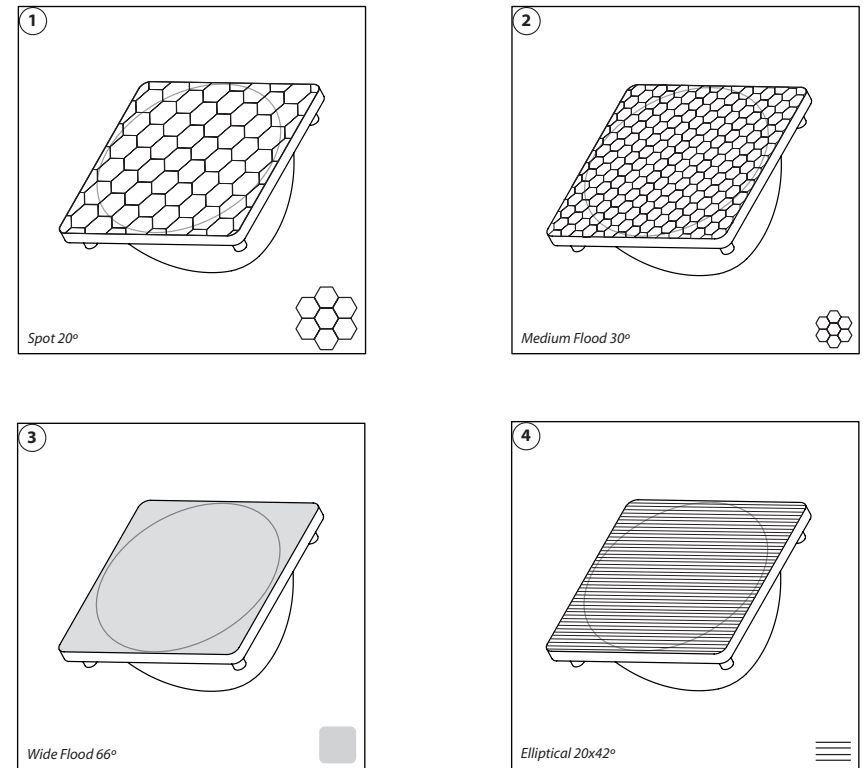


LIST OF SYMBOLS



Protection class
One, two or three



Application area
Indoor or outdoor



Application area
Floor, wall or ceiling



Swivel
Fixture is horizontally rotatable, indicated in degrees



Swivel
Fixture is vertically rotatable, indicated in degrees



Multiple connection
Daisychain connectivity



Installation depth
In centimeters



Installation size
In centimeters



Cable length
Maximum cable attached to the fixture in centimeters



Driver
Inclusive or exclusive Internal or external



Weight
In grams/kilograms



Pressure
Maximum pressure on the fixture in kg/cm²



Lifespan
Of the light source in hours



Lenses
Available lenses, indicated in degrees



LEDs
Kind of LED used in the fixture



Plug & play
Easy connection using the SmartConnect system



IP value
Ingress Protection classifies the degrees of protection provided against the intrusion of the product



Colour changing
RGB, RGB-W, RGB-A, AWB or Tunable White



Retail & Food LED modules
Clothing, furniture, kitchens, jewellery, shoes, bread, meat, fish & vegetables & fruit.



Colour
Available colours:
Amber, blue, red or green



White colour temperature
In different Kelvin values:
Cold white, neutral white, warm white or extra warm white



Curve
Minimal bending curve in centimeters



Cutting length
Indicated by the cutting marks



LED pitch
Pitch between the LEDs in millimeters



Power supply
In VDC, VAC or milliAmpere



Power consumption
In VA or Watt



Dimmable
1-10 Volt, Phase, individual, DMX dimmable or DALI



Bluetooth controlled
By Casambi



Magne dimming
Accurate dimming from 100 - 1% by using a magnet



Dynamic Control
Dynamic Power Control or Dynamic Temperature Control



DMX input
Fixture works on DMX512 protocol



Combined product
Compose your own fixture



Warranty
3 or 5 years warranty on the product



Conformité Européenne
CE marking for free marketability of industrial goods within the EU



Energy label



Lightsource
Equipped with a CLS, Citizen or a Xicato LED module

2018 CLS-LED BV. All rights reserved. Information subject to change without notice, CLS-LED BV and all affiliated companies disclaim liability for injury, damage direct or indirect loss, consequential or economic loss or any other loss occasioned by the use of, inability to use or reliance on the information contained in this manual. No part of this manual may be reproduced, in any form or by any means, without permission in writing from CLS-LED BV. Other legal information can be found in our General conditions, found on the back of your CLS-LED BV invoice, inside the CLS catalogue or on our website www.cls-led.com/General-Terms.pdf