






Index	2	Installation	4
Safety information	2	Lens replacement	5
Content	2	Lens index	6
Technical	3	Magno dimming	7
Specifications	3	List of symbols	8

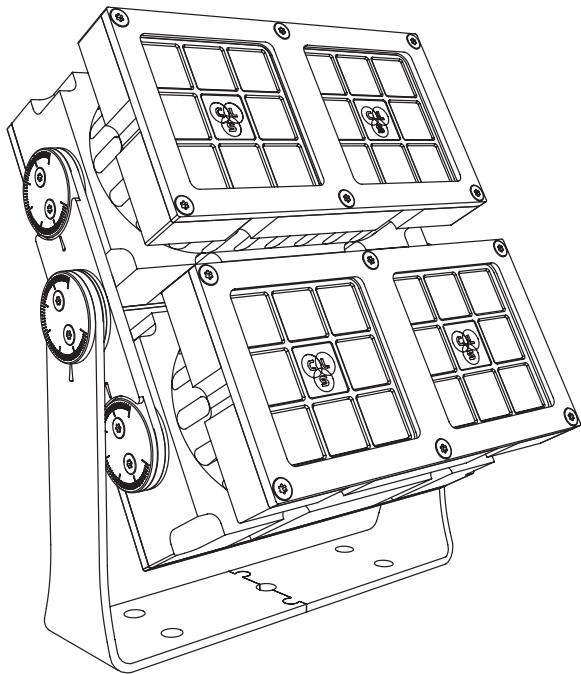


SAFETY INFORMATION




Make sure all connectors are connected properly




Use a source of AC power that complies to local electrical codes




Block access below the work area when maintaining the unit




Ambiance
Max. 40°




Qualified technician




Disconnect the power supply before installing or maintaining



Warning!
Some surfaces can be hot






Don't modify or install genuine parts on this product




Don't install in a flammable or explosive area

CONTENT

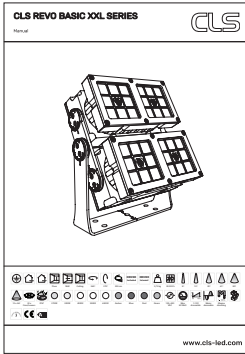





Floor




Wall




Ceiling




360°




270°




200 cm




DRIVER Included




DRIVER Internal




5,75 kg




50.000 h




8°




12°




30°




61°




80°




12 x 46°




32 x Cree/Luxeon




IP67




2700K




3000K




4000K




5000K




6500K




Amber




Blue




Red




Green




100-240 VAC




Max. 80 Watt




1-10V dimmable




Mains dimmable




Magno dimming





3 Year Warranty



CE



A





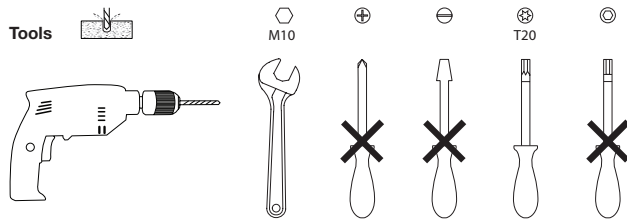
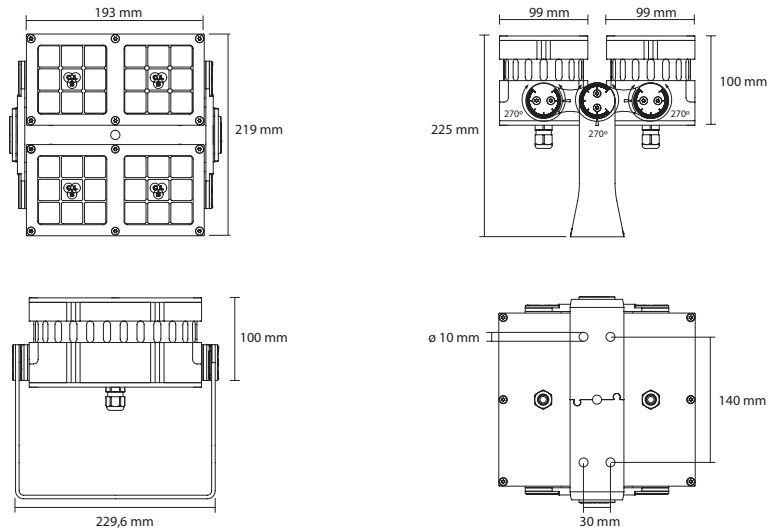


SPECIFICATIONS











LED: 32 x Cree or Luxeon Rebel
 Available colours: 2700K, 3000K, 4000K, 5000K, 6500K, amber, red, green and Royal blue
 Lenses: 8°, 12°, 30°, 61°, 80 and 12x46°
 Power supply: 100 ~ 240 VAC
 Power factor: > 0,99 (115VAC), > 0,95 (230 VAC)
 Power consumption: Max. 80 Watt
 Housing: Anodised aluminum
 Weight: 5,75 kg
 IP value: IP67
 Cable length: 2 meters
 Ambient temperature: -30° C till +50° C

ACCESSORIES

110415 CLS REVO lens kit superspot 8°, 8 lenses
 110425 CLS REVO lens kit spot 12°, 8 lenses
 110435 CLS REVO lens kit medium flood 30°, 8 lenses
 110445 CLS REVO lens kit wide flood 61°, 8 lenses
 110455 CLS REVO lens kit elliptical 12x46°, 8 lenses
 871992 CLS mold set, straight 8-26mm
 871995 CLS mold set Paguro grey
 Y106016 CLS Magnet pin (4 pcs)
 Y110795-G CLS REVO XL snoot grey
 Y110795-B CLS REVO XL snoot black

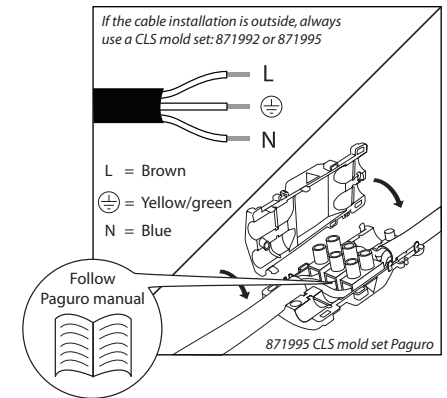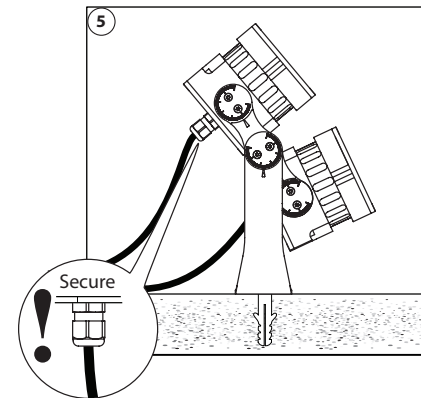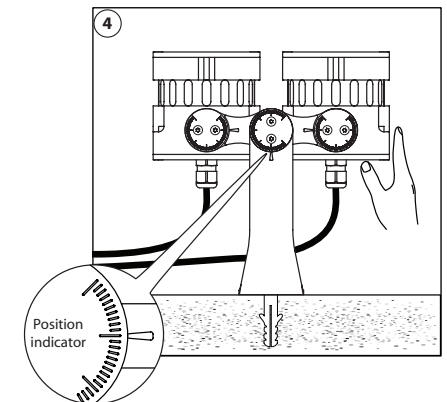
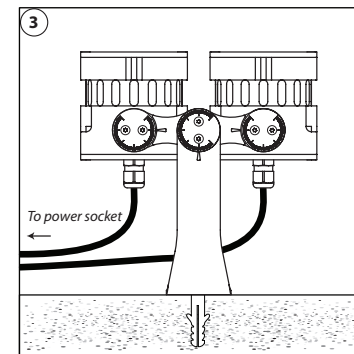
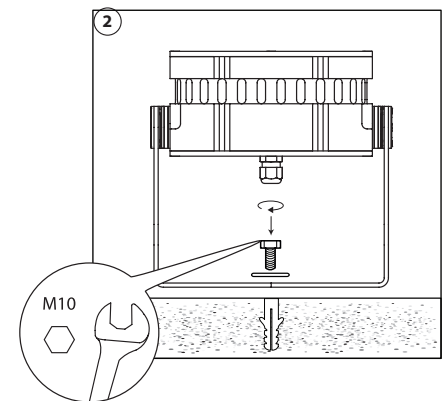
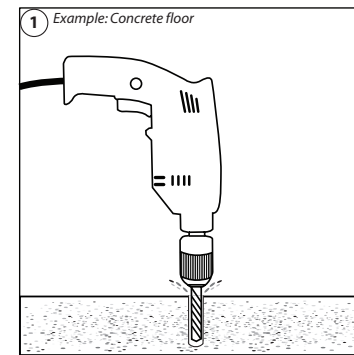


LENS REPLACEMENT

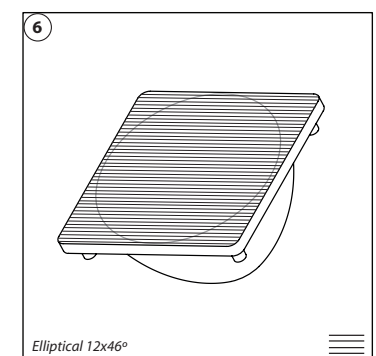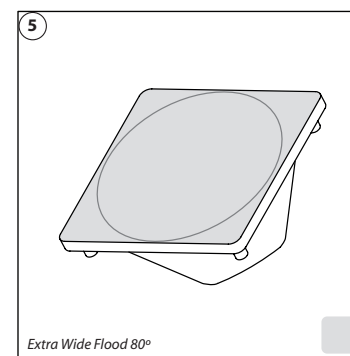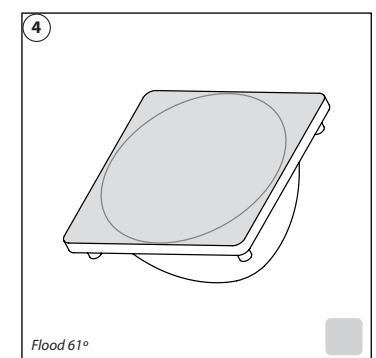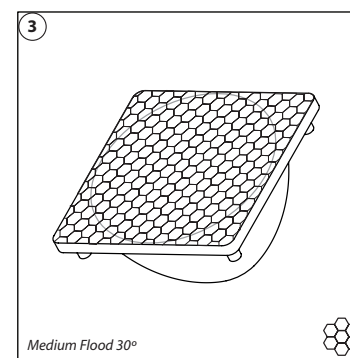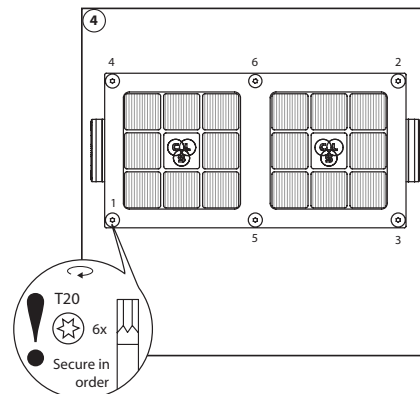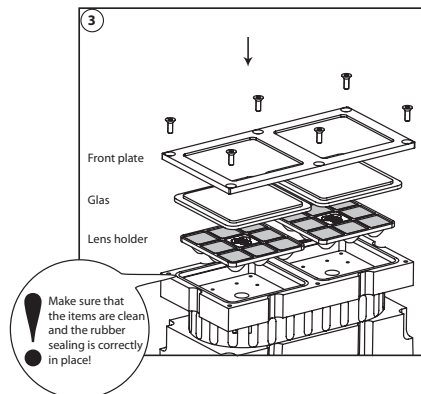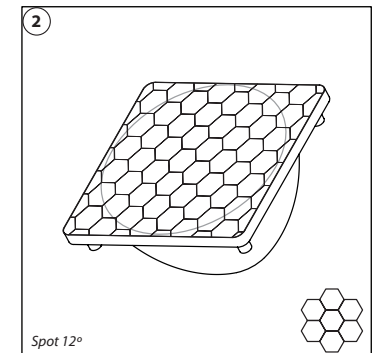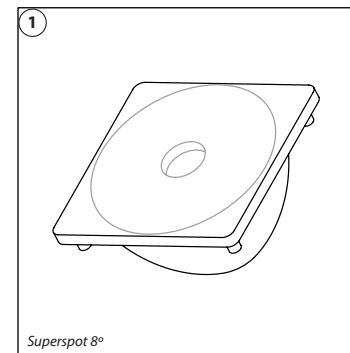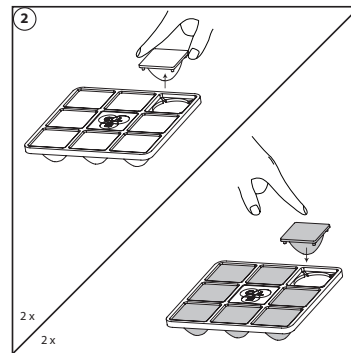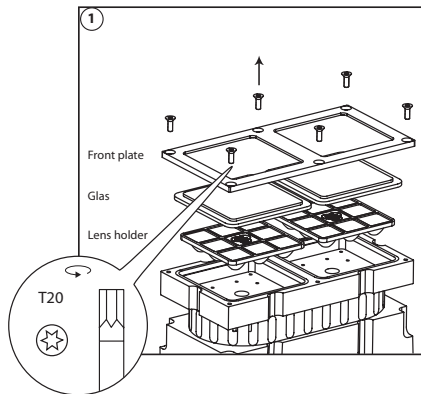

2018 CLS-LED BV. All rights reserved. Information subject to change without notice, CLS-LED BV and all affiliated companies disclaim liability for injury, damage direct or indirect loss, consequential or economic loss or any other loss occasioned by the use of, inability to use or reliance on the information contained in this manual. No part of this manual may be reproduced, in any form or by any means, without permission in writing from CLS-LED BV. Other legal information can be found in our General conditions, found on the back of your CLS-LED BV invoice, inside the CLS catalogue or on our website www.cls-led.com/General-Terms.pdf

MAGNO DIMMING

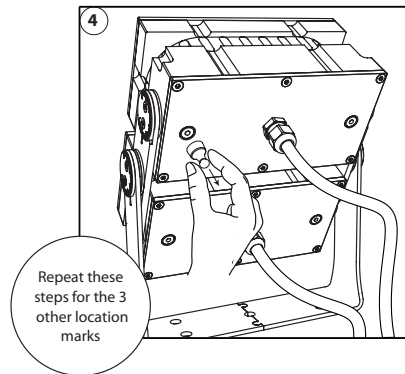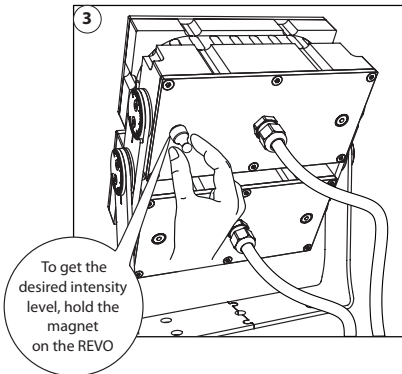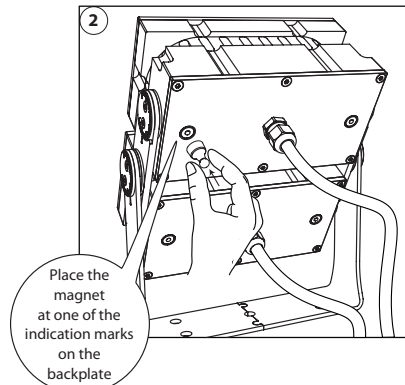

1. Place the magnet on the backplate, at the indicated spot.
2. The REVO XXL starts slowly dimming from 100 – 1% in approx. 30 seconds. The dimming is very accurate and precise, so steps are very small.
3. At the desired intensity level, take away the magnet.
4. After 10 seconds the REVO XXL flashes one time, the value has been stored on the internal memory.
5. When powering up the REVO XXL, the stored value will be recalled from the internal memory.
6. If you want to have a lower value, replace the magnet and the REVO XXL dims further to lower levels. To store the new setting repeat step 3 – 5.
7. If the REVO XXL is being dimmed to Level 0 and you have not programmed a value, it will automatically start at Level 100 and dim back from 100 – 1%.

LIST OF SYMBOLS

	Protection class One, two or three		Retail & Food LED modules Clothing, furniture, kitchens, jewellery, shoes, bread, meat, fish & vegetables & fruit.
	Application area Indoor or outdoor		Colour Available colours: Amber, blue, red or green
	Application area Floor, wall or ceiling		White colour temperature In different Kelvin values: Cold white, neutral white, warm white or extra warm white
	Swivel Fixture is horizontally rotatable, indicated in degrees		Curve Minimal bending curve in centimeters
	Swivel Fixture is vertically rotatable, indicated in degrees		Cutting length Indicated by the cutting marks
	Multiple connection Daisychain connectivity		LED pitch Pitch between the LEDs in millimeters
	Installation depth In centimeters		Power supply In VDC, VAC or milliAmpere
	Installation size In centimeters		Power consumption In VA or Watt
	Cable length Maximum cable attached to the fixture in centimeters		Dimmable 1-10 Volt, Phase, individual, DMX dimmable or DALI
	Driver Inclusive or exclusive Internal or external		Bluetooth controlled By Casambi
	Weight In grams/kilograms		Magno dimming Accurate dimming from 100 – 1% by using a magnet
	Pressure Maximum pressure on the fixture in kg/cm ²		Dynamic Control Dynamic Power Control or Dynamic Temperature Control
	Lifespan Of the light source in hours		DMX input Fixture works on DMX512 protocol
	Lenses Available lenses, indicated in degrees		Combined product Compose your own fixture
	LEDs Kind of LED used in the fixture		Warranty 3 or 5 years warranty on the product
	Plug & play Easy connection using the SmartConnect system		Conformité Européenne CE marking for free marketability of industrial goods within the EU
	IP value Ingress Protection classifies the degrees of protection provided against the intrusion of the product		Energy label
	Colour changing RGB, RGB-W, RGB-A, AWB or Tunable White		Light source Equipped with a CLS, Citizen or a Xicato LED module