# ARTY ACCENT

A compact spotlight that handles many different lighting situations

Available for all Ljusdesign lighting systems

Small and stylish

Interchangeable lenses

**Arty Accent** (formerly Arty PAR) is a medium-sized spotlight capable of handling most lighting situations. It features a compact and robust lamp housing made of aluminium.

While based on our reliable Dinkey platform, Arty Accent typically offers a higher power and light output comparatively.

Despite being a young spotlight, Arty Accent has already seen a number of improvements, including tool-less removal of lenses, filter holder implementation, as well as the addition of a Honeycomb accessory.

# Arty Accent is available for the following lighting systems:



# 3-Phase Track (220-240V AC)

\* Fixture has built-in 0-100% dimmer \* No external dimming possible



- Pico Trac (12V DC)
- \* Fixture has built-in 0-100% dimmer
- \* No external dimming possible
- \* Easy to install




# LED Profile (Constant current)

\* Dimmable from the wall or the app \* Can utilize external LED driver functions e.g. wall dimmers, Casambi, DMX or DALI \* Installed with connector cables



# Mini Trac (12V DC)

- \* Fixture has built-in 0-100% dimmer
- \* No external dimming possible
- \* Easy to install






Built-in 0-100% dimmer

# TECHNICAL SPECIFICATION LIGHT DATA

Material	Lamp housing made of aluminium, Yoke and details made of steel, Lens made of polycarbonate
Finish	Grey (RAL 7040) Black (RAL 9005) White (RAL 9016)
System	3-phase circuit track Pico Trac Mini Trac LED Profile
Protection class	IP20
Power consumption	6W/8W/10W
Beam angle	Interchangeable lenses
Color temperatures	2700K, 3000K, 4000K
Swivels	>365°
Tilts	>90°
Weight	280 g
Features	Filter holder, Toolless pan, Tilt lock

LED Lumen	510 lm
Luminaire Lumen	345 lm (Narrow lens)
CRI	90
Red component R9	>60
MacAdam	3-step ellipse (SDCM 3)
TM30-18 Rf	94
TM30-18 Rg	102

\* Data from 3000K, 8W/10W

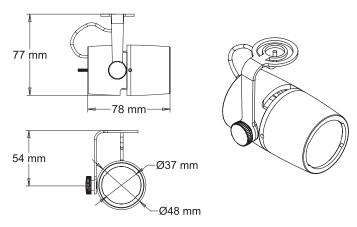

# SPOTLIGHTS ARTY ACCENT



# ARTY ACCENT / 230V

Built-in local dimmer (0-100%) Fits most known 3-phase tracks Slim profile adapter

### Arty Accent, 10W

2700K	ARTACC27C-HV-*	Arty Accent 230V/10W 2700K	480lm, CRI 90, lens N, 3-phase multi adapter, dimmer
3000K	ARTACC30C-HV-*	Arty Accent 230V/10W 3000K	510lm, CRI 90, lens N, 3-phase multi adapter, dimmer
4000K	ARTACC40C-HV-*	Arty Accent 230V/10W 4000K	540lm, CRI 90, lens N, 3-phase multi adapter, dimmer
	Arty Accent, 6W		
2700K	ARTACC27B-HV-*	Arty Accent 230V/6W 2700K	250lm, CRI 90, Iens N, 3-phase multi adapter, dimmer
2700K 3000K	ARTACC27B-HV-* ARTACC30B-HV-*	Arty Accent 230V/6W 2700K Arty Accent 230V/6W 3000K	250lm, CRI 90, lens N, 3-phase multi adapter, dimmer 260lm, CRI 90, lens N, 3-phase multi adapter, dimmer

\* 1: Grey 🔤 2: Black 🔳 3: White 🗌



# ARTY ACCENT / CCL

For LED Profile Operated by external LED driver

## Arty Accent CC for LED Profile, 1000mA

2700K	ARTACC27D-CCL-*	Arty Accent CC/1000mA LED-profile 2700K	420lm, CRI 90, Vf=6V, 1000mA, lens N
3000K	ARTACC30D-CCL-*	Arty Accent CC/1000mA LED-profile 3000K	450lm, CRI 90, Vf=6V, 1000mA, lins N

# Arty Accent CC for LED Profile, 500mA

2700K	ARTACC27B-CCL-*	Arty Accent CC/500mA LED-profile 2700K	420lm, CRI 90, Vf=12V, 500mA, lens N	
3000K	ARTACC30B-CCL-*	Arty Accent CC/500mA LED-profile 3000K	450lm, CRI 90, Vf=12V, 500mA, lens N	
	Arty Accent CC 250lm for	or LED Profile, 1200mA		
		· · · · · · · · · · · · · · · · · · ·		

2700K	ARTACC27-CCL-*	Arty Accent CC/1200mA LED-profile 2700K	250lm, CRI 90, Vf=3V, 1200mA, lens N
3000K	ARTACC30-CCL-*	Arty Accent CC/1200mA LED-profile 3000K	260lm, CRI 90, Vf=3V, 1200mA, lens N

\* 1: Grey 🔄 2: Black 🖬 3: White 🗌



# ARTY ACCENT / CCS

No driver / adapter included Operated by external LED driver

# Arty Accent CC Solo, 1000mA

2700K	ARTACC27D-CCS-*	Arty Accent CC/1000mA Solo 2700K	420lm, CRI 90, Vf=6V, 1000mA, lens N, 1m cable
3000K	ARTACC30D-CCS-*	Arty Accent CC/1000mA Solo 3000K	450lm, CRI 90, Vf=6V, 1000mA, lens N, 1m cable
	Arty Accent CC Solo, 5	00mA	
2700K	ARTACC27B-CCS-*	Arty Accent CC/500mA Solo 2700K	420lm, CRI 90, Vf=12V, 500mA, lens N, 1m cable
3000K	ARTACC30B-CCS-*	Arty Accent CC/500mA Solo 3000K	450lm, CRI 90, Vf=12V, 500mA, lens N, 1m cable
	Arty Accent CC 250lm S	Solo, 1200mA	
2700K	ARTACC27-CCS-*	Arty Accent CC/1200mA Solo 2700K	250lm, CRI 90, Vf=3V, 1200mA, lens N, 1m cable
3000K	ARTACC30-CCS-*	Arty Accent CC/1200mA Solo 3000K	260lm, CRI 90, Vf=3V, 1200mA, lens N, 1m cable

\* 1: Grey 🔄 2: Black 🖬 3: White 🗌



# ARTY ACCENT / PICO TRAC

Built-in local dimmer (0-100%) Fits Pico Trac

2700K	ARTACC27C-PT-*	Arty Accent 12V DC/8W PicoTrac 2700K	480lm, CRI 90, lens N, dimmer
3000K	ARTACC30C-PT-*	Arty Accent 12V DC/8W PicoTrac 3000K	510lm, CRI 90, lens N, dimmer
4000K	ARTACC40C-PT-*	Arty Accent 12V DC/8W PicoTrac 4000K	540lm, CRI 90, lens N, dimmer

\* 1: Grey 🔄 2: Black 🖬 3: White 🗌



# ARTY ACCENT / MINI TRAC

Built-in local dimmer (0-100%) Fits Mini Trac

2700K	ARTACC27C-MT-*	Arty Accent 12V DC/8W MiniTrac 2700K	480lm, CRI 90, lens N, dimmer
3000K	ARTACC30C-MT-*	Arty Accent 12V DC/8W MiniTrac 3000K	510lm, CRI 90, lens N, dimmer
4000K	ARTACC40C-MT-*	Arty Accent 12V DC/8W MiniTrac 4000K	540lm, CRI 90, lens N, dimmer

\* 1: Grey 📃 2: Black 🔳 3: White 🗌



# ARTY ACCENT / 12V DC SOLO

Built-in local dimmer (0-100%) Operated with 12V DC

2700K	ARTACC27C-LVS-*	Arty Accent 12V DC/8W Solo 2700K	480lm, CRI 90, lens N, dimmer, 1m cable
3000K	ARTACC30C-LVS-*	Arty Accent 12V DC/8W Solo 3000K	510lm, CRI 90, lens N, dimmer, 1m cable
4000K	ARTACC40C-LVS-*	Arty Accent 12V DC/8W Solo 4000K	540lm, CRI 90, lens N, dimmer, 1m cable

\* 1: Grey 🔄 2: Black 📕 3: White 🗌



# **ARTY ACCENT & DINKEY LENSES**

Lenses for Arty Accent and Dinkey fixtures

DIN-L-VN	Dinkey/Arty Accent lins, Very Narrow	Plain Tight, ca 12°
DIN-L-N	Dinkey/Arty Accent lins, Narrow	Frosted Narrow (Standard Lens), ca 14°
DIN-L-M	Dinkey/Arty Accent lins, Medium	Frosted Medium, ca 22°
DIN-L-W	Dinkey/Arty Accent lins, Wide	Frosted Wide, ca 28°
DIN-L-E	Dinkey/Arty Accent lins, Elliptic	Elliptical, 46x12°